


Models
EXXA, EXXD, EXXM
R410-A Models

Comfortmaker®
Air Conditioning & Heating

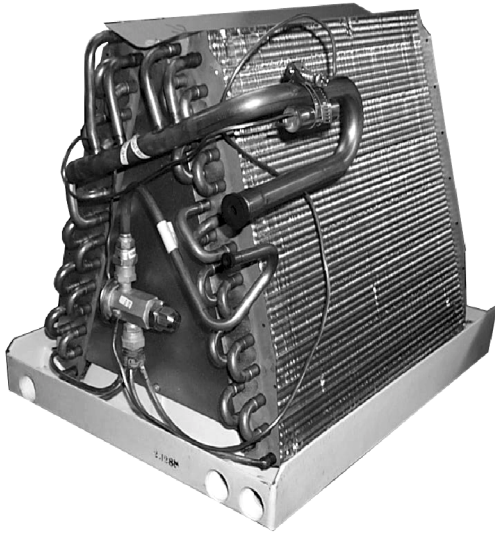

Representative photo only, some models may vary in appearance.

1 1/2 THRU 5 TON COILS

FEATURES

- Copper Tube/ Lanced Aluminum Fin Coil
- Three Primary Condensate Drain Connections
- Field Selectable Secondary Drain Location
- Polymer Thermoset Drain Pan
- Sweat Connect
- Dry Air Holding Charge
- Environment friendly R410-A Refrigerant
- Factory installed R410-A TXV

UNCASED Models "A" Coils

- Upflow/Downflow Applications

EXPANSION VALVE Models "Cased Coils"

- EXXD - Upflow / Downflow
- EXXM - Upflow / Downflow / Horizontal
- Upflow Cabinet Widths and Horizontal Cabinet Depths are Matched to 40" & 48" Gas Furnaces
- Cabinet Contains an "Uncased" Type Coil for Rating Purposes
- Internally Lined with Glass Fiber Insulation
- Prepainted Steel Cabinet
- Removable Front Access Panel




Rated in accordance with ARI Standard 210. Certification applies only when used with proper components as listed with ARI.




International Comfort Products Corporation (USA)
651 Heil-Quaker Ave.
Lewisburg, Tennessee 37091

RESIDENTIAL AND COMMERCIAL SYSTEMS • SPLIT SYSTEMS • PACKAGED AIR CONDITIONERS •
COMBINATION GAS / ELECTRIC UNITS • HEAT PUMPS • AIR HANDLERS • MANUFACTURED HOME AIR
CONDITIONERS • GAS, OIL AND ELECTRIC FURNACES

DIMENSIONS - "A" COILS

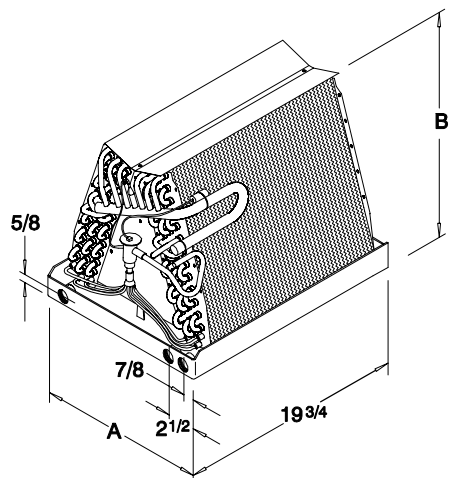

EXXA

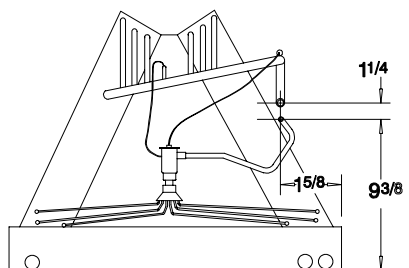

All measurements are inches

"A" COILS, EXXA

EXXA24B15A	14-3/4	14-1/2	20	25	TXV	$3/8$	$3/4$
EXXA24F19A	18-1/8	14-1/2	26	30	TXV	$3/8$	$3/4$
EXXA36B15A	14-3/4	18-7/8	28	32	TXV	$3/8$	$3/4$
EXXA36F19A	18-1/8	18-1/2	31	35	TXV	$3/8$	$3/4$
EXXA36J22A	21-7/8	17-1/2	32	37	TXV	$3/8$	$3/4$
EXXA42F19A	18-1/8	22-1/2	31	35	TXV	$3/8$	$7/8$
EXXA42J22A	21-7/8	22-1/4	38	44	TXV	$3/8$	$7/8$
EXXA48J22A	21-7/8	26-1/4	39	45	TXV	$3/8$	$7/8$
EXXA48L24A	23-1/2	26-1/4	48	55	TXV	$3/8$	$7/8$
EXXA48N26A	25-1/2	26	48	55	TXV	$3/8$	$7/8$
EXXA60L24A	23-1/2	26-1/2	59	68	TXV	$3/8$	$7/8$
EXXA60N26A	25-1/2	26	59	68	TXV	$3/8$	$7/8$



All measurements are inches

DIMENSIONS - DUAL PURPOSE UPFLOW / DOWNFLOW EXXD COILS

Model No.	Dimensions (Inches)			Weights		Refrigerant Control	Connection	
	A	B	C	Net	Shpg		Liq. O.D.	Suc O.D.
EXXD24B15B	15-1/2	14	18	33	37	TXV	3/8	3/4
EXXD36B15B	15-1/2	14	20	35	39	TXV	3/8	3/4
EXXD36F19B	19-1/8	17-5/8	20	38	42	TXV	3/8	3/4
EXXD42F19A	19-1/8	17-5/8	30	40	45	TXV	3/8	7/8
EXXD42J22A	22-3/4	21-1/4	24	43	48	TXV	3/8	7/8
EXXD48J22A	22-3/4	21-1/4	29-3/4	50	58	TXV	3/8	7/8
EXXD48L24A	24-1/2	22-7/8	28	60	67	TXV	3/8	7/8
EXXD48N26A	26 3/8	24-7/8	28	78	85	TXV	3/8	7/8
EXXD60L24A	24-1/2	22-7/8	30	80	89	TXV	3/8	7/8
EXXD60N26A	26 3/8	24-7/8	30	82	91	TXV	3/8	7/8

DIMENSIONS - CASED HORIZONTAL COILS - EXXM

Model No.	Dimensions (Inches)			Weights		Refrigerant	Connection	
							Sweat	
	A	B	C	Net	Shp		Control	Liq.
EXXM24B15A	14	15-1/2	22	33	37	TXV	3/8	3/4
EXXM24F19A	17-5/8	19-1/8	22	33	37	TXV	3/8	3/4
EXXM36B15A	14	15-1/2	22	40	44	TXV	3/8	3/4
EXXM36F19A	17-5/8	19-1/8	22	38	42	TXV	3/8	3/4
EXXM36J22A	21-1/4	22-3/4	24	39	43	TXV	3/8	3/4
EXXM42F19A	17-5/8	19-1/8	30	41	45	TXV	3/8	7/8
EXXM42J22A	21-1/4	22-3/4	30	43	48	TXV	3/8	7/8
EXXM48J22A	21-1/4	22-3/4	30	47	52	TXV	3/8	7/8
EXXM48L24A	22-7/8	24-1/2	30	65	71	TXV	3/8	7/8
EXXM48N26A	24-7/8	26-1/2	30	78	85	TXV	3/8	7/8
EXXM60L24A	22-7/8	24-1/2	33	83	92	TXV	3/8	7/8
EXXM60N26A	24-7/8	26-1/2	33	87	96	TXV	3/8	7/8

PERFORMANCE DATA (CFM vs DRY/WET STATIC @ INCHES WATER COLUMN)

Model No.	400		500		600		700		800		900		1000		1100		1200		1300		1400	
	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet
EXX(A,D)24B,F					.13	.16	.17	.20	.22	.26	.28	.33	.34	.40								
EXXM24B,F					.15	.18	.20	.23	.26	.30	.32	.37	.38	.44								
EXX(A,D)36F											.18	.21	.21	.26	.25	.30	.29	.36	.34	.41		
EXXM36F											.19	.22	.23	.27	.28	.32	.32	.37	.37	.42		
EXX(A,D)36J													.14	.20	.16	.23	.18	.26	.21	.30	.21	.33
EXXM36J													.16	.23	.19	.27	.22	.31	.25	.36	.29	.41
EXX(A,D)42J													.19	.23	.22	.27	.26	.31	.30	.35	.34	.40
EXXM42J													.18	.23	.21	.27	.24	.31	.28	.36	.33	.41

Model No.	1000		1100		1200		1300		1400		1500		1600		1700		1800		1900		2000	
	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet	Dry	Wet
EXX(A,D)48N					.17	.22	.20	.25	.22	.28	.25	.31	.27	.34								
EXXM48N					.23	.26	.26	.29	.29	.33	.32	.37	.35	.41								
EXX(A,D)60N									.18	.22	.21	.25	.24	.29	.27	.34	.30	.38	.34	.42	.37	.47
EXXM60N									.19	.24	.22	.27	.25	.31	.28	.35	.32	.39	.36	.44	.40	.49

MODEL NUMBER IDENTIFICATION GUIDE - A COILS

E	XX	A		36	B15	A
EVAPORATOR						Revision Code
						Cabinet / Drain Pan Width
						B15 = 15 1/2" Cabinet / 14 3/4" Drain Pan
						F19 = 19 1/8" Cabinet / 18 1/8" Drain Pan
						J22 = 22 3/4" Cabinet / 21 7/8" Drain Pan
						N26 = 26 3/8" Cabinet / 25 1/2" Drain Pan
						L24 = 24 1/2" Cabinet / 14 1/2" Drain Pan
						Nominal Capacity
						18 = 1 1/2 Ton, 24 = 2 Ton, 30 = 3 1/2 Ton
						36 = 3 Ton, 42 = 3 1/2 Ton, 48 = 4 Ton, 60 = 5 Ton
	XX = TXV for R410-A Refrigerant					
	A = Loose Coil, No Cabinet					
	D = Dual Purpose, Upflow / Downflow					
	M = Multi Purpose, Upflow / Downflow / Horizontal					