

13 SEER R-410A PACKAGE GAS / ELECTRIC UNIT (1 Phase) 2 - 5 TONS

REFRIGERATION CIRCUIT

- All models are equipped with high efficiency 2-stage Copeland scroll compressor.
- Thermostatic Expansion Valve (TXV) on select models to control refrigerant flow.
- High Efficiency Brushless DC Indoor Motors on all models.
- High and Low pressure switches for excellent compressor protection.

BUILT TO LAST

- Stainless steel tubular heat exchanger.
- Galvanized-painted cabinet. One piece weather resistant top. Access panels for easy service. Side by side supply and return. Heavy gauge base rails.
- Triple-coated steel, consisting of a polyester top coat, a urethane primer coat preceded by an oxide pretreatment.
- Integral base rails with fork-lift access. Holes provided for lifting lugs makes rooftop installation easier.
- The condenser coil has a sturdy wire inlet grille and UV rated vinyl mesh installed on the surface of the coil for additional protection.
- Advanced Air Management System for quieter operation.

EASY TO INSTALL AND SERVICE

- Combination gas heating and electric cooling, self contained for year-round comfort. Systems installed on rooftop or ground level. The unit is shipped in the horizontal position and can easily be converted to downflow.
- Externally-mounted gauge ports allow for more accurate reading of operating conditions while servicing.
- Electrical and gas controls located behind one exterior panel for easier maintenance.
- Adjustable electronic fan control with optional low speed continuous fan feature responds quickly to circulate heated air and provide maximum comfort.

WARRANTY

- 5 year No Hassle replacement limited warranty
- Limited Lifetime Heat Exchanger warranty
- 10 year compressor limited warranty
- 5 year parts limited warranty



UNIT PERFORMANCE DATA

Model Number	COOLING		HEATING		Voltage-Phase-Hz	Unit Dimensions H x W x L	Ship Weight
	Rated Capacity BTUH	S.E.E.R	Input (BTUH)	Efficiency (AFUE%)			
PGX324040K0*A	22,800	13.5	40,000	78.4	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	430
PGX324060K0*A	22,800	13.5	60,000	79.2	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	434
PGX324080K0*A	22,800	13.5	80,000	78.2	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	439
PGX330040K0*A	28,000	13.5	40,000	78.4	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	434
PGX330060K0*A	28,000	13.5	60,000	79.2	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	437
PGX330080K0*A	28,000	13.5	80,000	78.2	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	437
PGX336060K0*A	34,600	13.5	60,000	79.2	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	439
PGX336080K0*A	34,600	13.5	80,000	78.2	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	441
PGX336100K0*A	34,600	13.5	100,000	78.7	208/230-1-60	32-1/2 X 47-5/16 X 47-5/16	443
PGX342080K0*A	40,000	13.0	80,000	79.6	208/230-1-60	36 X 47-5/16 X 73	612
PGX342100K0*A	40,000	13.0	100,000	78.7	208/230-1-60	36 X 47-5/16 X 73	614
PGX348080K0*A	45,000	13.5	80,000	79.6	208/230-1-60	36 X 47-5/16 X 73	618
PGX348120K0*A	45,000	13.5	120,000	78.8	208/230-1-60	36 X 47-5/16 X 73	619
PGX348140K0*A	45,000	13.5	140,000	78.1	208/230-1-60	36 X 47-5/16 X 73	620
PGX360080K0*A	57,000	13.5	80,000	79.6	208/230-1-60	36 X 47-5/16 X 73	628
PGX360120K0*A	57,000	13.5	120,000	78.8	208/230-1-60	36 X 47-5/16 X 73	631
PGX360140K0*A	57,000	13.5	140,000	78.1	208/230-1-60	36 X 47-5/16 X 73	632

* 0 = Standard Model, 1 = Low NOx California Model

UNIT SPECIFICATIONS

MODEL * NUMBER	Electrical Data			Condenser Data									Sound Ratings (db)
				Coil			Fan Motor			Fan			
	208 / 230 Voltage Phase - Hz	HACR Brkr Max Fuse	Minimum Circuit Ampacity	Total Face Area (Sq. Ft.)	Fins Per In. / Rows	Tube Diameter (In.)	HP	Full Load Amps	Locked Rotor Amps	Size Diameter (In.)	RPM (Max.)	CFM (Design)	
PGX324040K0*A	1-60	25 amps.	17.8	11.40	18 / 2	3/8	1/8	0.9	1.6	20	825	2200	72
PGX324060K0*A	1-60	25 amps.	17.8	11.40	18 / 2	3/8	1/8	0.9	1.6	20	825	2200	72
PGX324080K0*A	1-60	25 amps.	17.8	11.40	18 / 2	3/8	1/8	0.9	1.6	20	825	2200	72
PGX330040K0*A	1-60	30 amps.	22.6	11.46	18 / 2	3/8	1/8	0.9	1.6	20	825	2200	73
PGX330060K0*A	1-60	30 amps.	22.6	11.46	18 / 2	3/8	1/8	0.9	1.6	20	825	2200	73
PGX330080K0*A	1-60	30 amps.	22.6	11.46	18 / 2	3/8	1/8	0.9	1.6	20	825	2200	73
PGX336060K0*A	1-60	40 amps.	28.2	11.40	18 / 2	3/8	1/4	1.4	3.7	20	1100	2200	75
PGX336080K0*A	1-60	40 amps.	28.2	11.40	18 / 2	3/8	1/4	1.4	3.7	20	1100	2200	75
PGX336100K0*A	1-60	40 amps.	28.2	11.40	18 / 2	3/8	1/4	1.4	3.7	20	1100	2200	75
PGX342080K0*A	1-60	40 amps.	28.9	12.99	18 / 2	3/8	1/4	1.4	3.7	22	1100	2200	77
PGX342100K0*A	1-60	40 amps.	28.9	12.99	18 / 2	3/8	1/4	1.4	3.7	22	1100	2200	77
PGX348080K0*A	1-60	50 amps.	35.5	12.99	18 / 2	3/8	1/4	1.4	3.7	22	1100	2400	77
PGX348120K0*A	1-60	50 amps.	35.5	12.99	18 / 2	3/8	1/4	1.4	3.7	22	1100	2400	77
PGX348140K0*A	1-60	50 amps.	35.5	12.99	18 / 2	3/8	1/4	1.4	3.7	22	1100	2400	77
PGX360080K0*A	1-60	60 amps.	41.2	17.12	18 / 2	3/8	1/4	1.4	3.0	22	1100	3000	78
PGX360120K0*A	1-60	60 amps.	41.2	17.12	18 / 2	3/8	1/4	1.4	3.0	22	1100	3000	78
PGX360140K0*A	1-60	60 amps.	41.2	17.12	18 / 2	3/8	1/4	1.4	3.0	22	1100	3000	78

* 0 = Standard Model, 1 = Low Nox California Model

MODEL NUMBER	Evaporator Coil									Scroll Compressor		Factory Refrigerant Charge R410A (lbs.)	Ship Weight (Lbs.)
	Coil			Motor			Blower			Rated Load Amps	Locked Rotor Amps		
	Total Face Area (Sq. Ft.)	Fins Per In. / Rows	Tube Diam. (In.)	Horse Power	Full Load Amps	No. of Speed Taps	Size	RPM (Max)	CFM Rated				
PGX324040K0*A	3.56	14 / 4	3/8	1/2	4.1	5	10 x 8	1050	800	10.3	52.0	10.3	430
PGX324060K0*A	3.56	14 / 4	3/8	1/2	4.1	5	10 x 8	1050	800	10.3	52.0	10.3	434
PGX324080K0*A	3.56	14 / 4	3/8	1/2	4.1	5	10 x 8	1050	800	10.3	52.0	10.3	439
PGX330040K0*A	3.56	14 / 3	3/8	1/2	4.1	5	10 x 8	1050	1000	14.1	70.0	8.1	434
PGX330060K0*A	3.56	14 / 3	3/8	1/2	4.1	5	10 x 8	1050	1000	14.1	70.0	8.1	437
PGX330080K0*A	3.56	14 / 3	3/8	1/2	4.1	5	10 x 8	1050	1000	14.1	70.0	8.1	437
PGX336060K0*A	3.56	14 / 4	3/8	3/4	6.0	4	11 x 9	1050	1200	16.7	82.0	10.2	439
PGX336080K0*A	3.56	14 / 4	3/8	3/4	6.0	4	11 x 9	1050	1200	16.7	82.0	10.2	441
PGX336100K0*A	3.56	14 / 4	3/8	3/4	6.0	4	11 x 9	1050	1200	16.7	82.0	10.2	443
PGX342080K0*A	5.14	14 / 3	3/8	3/4	6.0	5	11 x 9	1050	1400	17.2	96.0	12.7	612
PGX342100K0*A	5.14	14 / 3	3/8	3/4	6.0	5	11 x 9	1050	1400	17.2	96.0	12.7	614
PGX348080K0*A	5.14	14 / 3	3/8	1.0	7.7	5	11 x 10	1050	1600	21.2	96.0	11.8	618
PGX348120K0*A	5.14	14 / 3	3/8	1.0	7.7	5	11 x 10	1050	1600	21.2	96.0	11.8	619
PGX348140K0*A	5.14	14 / 3	3/8	1.0	7.7	5	11 x 10	1050	1600	21.2	96.0	11.8	620
PGX360080K0*A	8.22	14 / 3	3/8	1.0	7.7	5	11 x 10	1050	2000	25.6	118.0	15.00	628
PGX360120K0*A	8.22	14 / 3	3/8	1.0	7.7	5	11 x 10	1050	2000	25.6	118.0	15.00	631
PGX360140K0*A	8.22	14 / 3	3/8	1.0	7.7	5	11 x 10	1050	2000	25.6	118.0	15.00	632

* 0 = Standard Model, 1 = Low Nox California Model

UNIT PERFORMANCE DATA (230V - 1 Phase - 60 Hz)

Model Number	COOLING				HEATING	
	Rated Capacity BTUH	S.E.E.R	E.E.R.	S/T Ratio	Input (BTUH)	Efficiency (AFUE%)
PGX324040K0*A	22,800	13.5	10.5	0.76	40,000	78.4
PGX324060K0*A	22,800	13.5	10.5	0.76	60,000	79.2
PGX324080K0*A	22,800	13.5	10.5	0.76	80,000	78.2
PGX330040K0*A	28,000	13.5	10.5	0.79	40,000	78.4
PGX330060K0*A	28,000	13.5	10.5	0.79	60,000	79.2
PGX330080K0*A	28,000	13.5	10.5	0.79	80,000	78.2
PGX336060K0*A	34,600	13.5	10.0	0.76	60,000	79.2
PGX336080K0*A	34,600	13.5	10.0	0.76	80,000	78.2
PGX336100K0*A	34,600	13.5	10.0	0.76	100,000	78.7
PGX342080K0*A	40,000	13.0	10.0	0.76	80,000	79.6
PGX342100K0*A	40,000	13.0	10.0	0.76	100,000	78.7
PGX348080K0*A	45,000	13.5	10.2	0.76	80,000	79.6
PGX348120K0*A	45,000	13.5	10.2	0.76	120,000	78.8
PGX348140K0*A	45,000	13.5	10.2	0.76	140,000	78.1
PGX360080K0*A	57,000	13.5	10.2	0.76	80,000	79.6
PGX360120K0*A	57,000	13.5	10.2	0.76	120,000	78.8
PGX360140K0*A	57,000	13.5	10.2	0.76	140,000	78.1

* 0 = Standard Model, 1 = Low Nox California Model

PGX3 SERIES HEATING CHART

Heating Rise range = 35 °F - 65 °F				External Static Pressure (in H2O)																
				.1"		.2"		.3"		.4"		.5"		.6"		.7"		.8"		
Model	Cooling Tons	Heating Input (Btu/hr)	Speed Tap	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	
PGX324040K****	2	40000	5	1251	NA	1218	NA	1194	NA	1170	NA	1139	NA	1100	NA	1063	NA	988	NA	
			4	951	NA	914	NA	883	NA	858	35	811	37	775	38	733	40	697	43	
			3	869	NA	842	35	809	37	768	39	736	40	684	43	650	46	599	49	
			2	711	42	655	45	623	48	564	53	529	56	481	62	431	NA	392	NA	
			1	661	45	478	62	334	NA	262	NA	219	NA	196	NA	NA	NA	NA	NA	
PGX324060K****		60000	5	1251	36	1218	36	1194	37	1170	38	1139	39	1100	40	1063	42	988	45	
			4	951	47	914	49	883	50	858	52	811	55	775	57	733	61	697	64	
			3	869	51	842	53	809	55	768	58	736	60	684	65	650	NA	599	NA	
			2	711	63	655	NA	623	NA	564	NA	529	NA	481	NA	431	NA	392	NA	
PGX324080K****		80000	1	661	NA	478	NA	334	NA	262	NA	219	NA	196	NA	NA	NA	NA	NA	
			5	1251	47	1218	49	1194	50	1170	51	1139	52	1100	54	1063	56	988	60	
			4	951	62	914	65	883	NA	858	NA	811	NA	775	NA	733	NA	697	NA	
			3	869	NA	842	NA	809	NA	768	NA	736	NA	684	NA	650	NA	599	NA	
PGX330040K****		2.5	40000	2	711	NA	655	NA	623	NA	564	NA	529	NA	481	NA	431	NA	392	NA
				1	661	NA	478	NA	334	NA	262	NA	219	NA	196	NA	NA	NA	NA	NA
	5			1255	NA	1227	NA	1201	NA	1164	NA	1138	NA	1112	NA	1077	NA	1027	NA	
	4			1106	NA	1080	NA	1048	NA	1017	NA	992	NA	954	NA	924	NA	881	NA	
	3			958	NA	923	NA	894	NA	857	35	828	36	786	38	750	40	712	42	
PGX330060K****	60000		2	789	38	747	40	714	41	668	44	630	47	582	51	542	55	495	60	
			1	754	39	708	42	671	44	618	48	584	51	524	57	494	60	443	NA	
			5	1255	35	1227	36	1201	37	1164	38	1138	39	1112	40	1077	41	1027	43	
			4	1106	40	1080	41	1048	42	1017	44	992	45	954	47	924	48	881	50	
PGX330080K****	80000		3	958	46	923	48	894	50	857	52	828	54	786	57	750	59	712	62	
			2	789	56	747	59	714	62	668	NA	630	NA	582	NA	542	NA	495	NA	
			1	754	59	708	63	671	NA	618	NA	584	NA	524	NA	494	NA	443	NA	
			5	1255	47	1227	48	1201	49	1164	51	1138	52	1112	53	1077	55	1027	58	
PGX336060K****	3		60000	4	1106	54	1080	55	1048	57	1017	58	992	60	954	62	924	64	881	NA
				3	958	62	923	64	894	NA	857	NA	828	NA	786	NA	750	NA	712	NA
		2		789	NA	747	NA	714	NA	668	NA	630	NA	582	NA	542	NA	495	NA	
		1		754	NA	708	NA	671	NA	618	NA	584	NA	524	NA	494	NA	443	NA	
		4		1630	NA	1588	NA	1526	NA	1477	NA	1415	NA	1354	NA	1287	35	1216	37	
PGX336080K****		80000	3	1276	35	1242	36	1209	37	1179	38	1150	39	1117	40	1086	41	1045	43	
			2	1026	43	994	45	949	47	913	49	871	51	841	53	793	56	735	60	
			1	876	51	841	53	794	56	756	59	694	64	651	NA	598	NA	543	NA	
			4	1630	36	1588	37	1526	39	1477	40	1415	42	1354	44	1287	46	1216	49	
PGX336080K****	80000	3	1276	46	1242	48	1209	49	1179	50	1150	52	1117	53	1086	55	1045	57		
		2	1026	58	994	60	949	62	913	65	871	NA	841	NA	793	NA	735	NA		
		1	876	NA	841	NA	794	NA	756	NA	694	NA	651	NA	598	NA	543	NA		

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

PGX3 SERIES HEATING CHART

Heating Rise range = 35 °F - 65 °F				External Static Pressure (in H2O)															
				.1"		.2"		.3"		.4"		.5"		.6"		.7"		.8"	
Model	Cooling Tons	Heating Input (Btu/hr)	Speed Tap	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)	CFM	Heating Rise (°F)
PGX336100K****		100000	4	1630	45	1588	47	1526	49	1477	50	1415	52	1354	55	1287	58	1216	61
			3	1276	58	1242	60	1209	61	1179	63	1150	64	1117	NA	1086	NA	1045	NA
			2	1026	NA	994	NA	949	NA	913	NA	871	NA	841	NA	793	NA	735	NA
			1	876	NA	841	NA	794	NA	756	NA	694	NA	651	NA	598	NA	543	NA
PGX342080K****		80000	5	1569	38	1537	39	1500	40	1463	41	1423	42	1389	43	1353	44	1317	45
			4	1481	40	1448	41	1412	42	1374	43	1336	44	1298	46	1263	47	1226	48
			3	1302	46	1260	47	1219	49	1179	50	1138	52	1103	54	1060	56	1015	58
			2	1170	51	1129	52	1088	54	1050	56	1007	59	963	62	912	65	866	NA
PGX342100K****		100000	1	1028	58	969	61	924	64	881	NA	838	NA	789	NA	731	NA	680	NA
			5	1569	47	1537	48	1500	49	1463	51	1423	52	1389	53	1353	55	1317	56
			4	1481	50	1448	51	1412	52	1374	54	1336	55	1298	57	1263	59	1226	60
			3	1302	57	1260	59	1219	61	1179	63	1138	65	1103	NA	1060	NA	1015	NA
PGX348080K****		80000	2	1170	63	1129	NA	1088	NA	1050	NA	1007	NA	963	NA	912	NA	866	NA
			1	1028	NA	969	NA	924	NA	881	NA	838	NA	789	NA	731	NA	680	NA
		120000	5	2103	NA	2051	NA	2001	NA	1942	NA	1878	NA	1809	NA	1723	NA	1632	36
			4	1831	NA	1797	NA	1763	NA	1732	NA	1696	35	1661	36	1621	37	1559	38
PGX348120K****		120000	3	1680	35	1650	36	1614	37	1578	38	1544	38	1507	39	1470	40	1427	42
			2	1304	45	1256	47	1216	49	1167	51	1126	53	1077	55	1026	58	979	61
			1	1173	51	1127	53	1085	55	1027	58	983	60	927	64	881	NA	821	NA
			5	2103	42	2051	43	2001	44	1942	46	1878	47	1809	49	1723	52	1632	54
PGX348140K****		140000	4	1831	49	1797	49	1763	50	1732	51	1696	52	1661	54	1621	55	1559	57
			3	1680	53	1650	54	1614	55	1578	56	1544	58	1507	59	1470	60	1427	62
			2	1304	NA	1256	NA	1216	NA	1167	NA	1126	NA	1077	NA	1026	NA	979	NA
			1	1173	NA	1127	NA	1085	NA	1027	NA	983	NA	927	NA	881	NA	821	NA
PGX360080K****		80000	5	2103	49	2051	51	2001	52	1942	53	1878	55	1809	57	1723	60	1632	64
			4	1831	57	1797	58	1763	59	1732	60	1696	61	1661	62	1621	64	1559	NA
			3	1680	62	1650	63	1614	64	1578	NA	1544	NA	1507	NA	1470	NA	1427	NA
			2	1304	NA	1256	NA	1216	NA	1167	NA	1126	NA	1077	NA	1026	NA	979	NA
PGX360120K****		120000	1	1173	NA	1127	NA	1085	NA	1027	NA	983	NA	927	NA	881	NA	821	NA
			5	2188	NA	2140	NA	2096	NA	2039	NA	1974	NA	1905	NA	1827	NA	1745	NA
			4	2091	NA	2056	NA	2023	NA	1987	NA	1935	NA	1878	NA	1811	NA	1729	NA
			3	1839	NA	1807	NA	1772	NA	1735	NA	1702	35	1667	36	1629	36	1590	37
PGX360140K****		140000	2	1393	43	1356	44	1313	45	1280	46	1226	48	1184	50	1130	52	1086	55
			1	1300	46	1263	47	1214	49	1169	51	1117	53	1073	55	1026	58	975	61
			5	2188	41	2140	42	2096	42	2039	44	1974	45	1905	47	1827	49	1745	51
			4	2091	43	2056	43	2023	44	1987	45	1935	46	1878	47	1811	49	1729	51
PGX360140K****		140000	3	1839	48	1807	49	1772	50	1735	51	1702	52	1667	53	1629	55	1590	56
			2	1393	64	1356	NA	1313	NA	1280	NA	1226	NA	1184	NA	1130	NA	1086	NA
			1	1300	NA	1263	NA	1214	NA	1169	NA	1117	NA	1073	NA	1026	NA	975	NA
			5	2188	47	2140	48	2096	49	2039	51	1974	53	1905	54	1827	57	1745	59
PGX360140K****		140000	4	2091	50	2056	50	2023	51	1987	52	1935	54	1878	55	1811	57	1729	60
			3	1839	56	1807	57	1772	59	1735	60	1702	61	1667	62	1629	64	1590	65
			2	1393	NA	1356	NA	1313	NA	1280	NA	1226	NA	1184	NA	1130	NA	1086	NA
			1	1300	NA	1263	NA	1214	NA	1169	NA	1117	NA	1073	NA	1026	NA	975	NA

BLOWER PERFORMANCE DATA

Model Number		PGX324					PGX330					PGX336				
Torque (oz.-Ft.)		5.96	10.98	15.53	18.04	29.02	11.92	13.02	18.04	23.06	29.02	18.59	24.00	34.35	52.94	-
Speed Tap		1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
Air Delivery in CFM @ Varying External Static Pressure (in. w.c.)	0.1	661	711	869	951	1251	754	789	958	1106	1255	876	1026	1276	1630	-
	0.2	478	655	842	914	1218	708	747	923	1080	1227	841	994	1242	1588	-
	0.3	334	623	809	883	1194	671	714	894	1048	1201	794	949	1209	1526	-
	0.4	262	564	768	858	1170	618	668	857	1017	1164	756	913	1179	1477	-
	0.5	219	529	736	811	1139	584	630	828	992	1138	694	871	1150	1415	-
	0.6	196	481	684	775	1100	524	582	786	954	1112	651	841	1117	1354	-
	0.7	-	431	650	733	1063	494	542	750	924	1077	598	793	1086	1287	-
	0.8	-	392	599	697	988	443	495	712	881	1027	543	735	1045	1216	-
	0.9	-	334	569	658	871	382	460	661	838	934	499	683	998	1145	-
	1	-	305	523	618	745	342	403	630	755	809	464	638	946	1070	-
Model Number		PGX342					PGX348					PGX360				
Torque (oz.-Ft.)		19.06	23.06	34.12	41.88	44.00	26.98	32.00	51.14	59.92	80.00	30.12	31.06	55.84	73.10	80.00
Speed Tap		1	2	3	4	5	1	2	3	4	5	1	2	3	4	5
Air Delivery in CFM @ Varying External Static Pressure (in. w.c.)	0.1	973	1028	1302	1481	1569	1173	1304	1680	1831	2103	1300	1368	1839	2091	2188
	0.2	900	969	1260	1448	1537	1127	1256	1650	1797	2051	1263	1321	1807	2056	2140
	0.3	853	924	1219	1412	1500	1085	1216	1614	1763	2001	1214	1283	1772	2023	2096
	0.4	797	881	1179	1374	1463	1027	1167	1578	1732	1942	1169	1231	1735	1987	2039
	0.5	749	838	1138	1336	1423	983	1126	1544	1696	1878	1117	1197	1702	1935	1974
	0.6	702	789	1103	1298	1389	927	1077	1507	1661	1809	1073	1144	1667	1878	1905
	0.7	642	731	1060	1263	1353	881	1026	1470	1621	1723	1026	1105	1629	1811	1827
	0.8	581	680	1015	1226	1317	821	979	1427	1559	1632	975	1038	1590	1729	1745
	0.9	529	617	963	1186	1276	764	921	1373	1446	1526	926	969	1535	1640	1642
	1	476	562	923	1143	1208	710	875	1289	1339	1388	862	913	1460	1536	1537

Notes:

Air Delivery @ listed external static pressure are taken at 230 Volts with Dry coil, no filter and approved heater.

For wet coil add .05 in. wc. to Static Pressure measurement. Note for 208 Volts applications, reduce airflow by 15%.

	Blower Speed Tap Settings				
	Heating Input (Btu/hr)	Heating Rise Range (°F)	Heating Speed Tap (Red)	Low Stage Cooling Speed Tap (Violet)	High Stage Cooling Speed Tap (Black)
PGX324040K****	40,000	35 - 65	2	1	3
PGX324060K****	60,000	35 - 65	5	1	3
PGX324080K****	80,000	35 - 65	5	1	3
PGX330040K****	40,000	35 - 65	2	1	4
PGX330060K****	60,000	35 - 65	5	1	4
PGX330080K****	80,000	35 - 65	5	1	4
PGX336060K****	60,000	35 - 65	2	1	3
PGX336080K****	80,000	35 - 65	4	1	3
PGX336100K****	100,000	35 - 65	4	1	3
PGX342080K****	80,000	35 - 65	5	1	4
PGX342100K****	100,000	35 - 65	5	1	4
PGX348080K****	80,000	35 - 65	4	1	3
PGX348120K****	120,000	35 - 65	4	1	3
PGX348140K****	140,000	35 - 65	4	1	3
PGX360080K****	80,000	35 - 65	3	2	4
PGX360120K****	120,000	35 - 65	3	2	4
PGX360140K****	140,000	35 - 65	3	2	4

EXPANDED PERFORMANCE DATA: COOLING

PGX324***K**A

OD Ambient (°F)	ID Airflow (SCFM)	700					800					900				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	23.5	24.3	24.7	26.7	29.2	24.6	25.0	25.4	27.3	29.9	25.6	25.7	25.9	27.9	30.5
	S/T	0.98	0.91	0.73	0.70	0.51	0.98	0.96	0.76	0.73	0.53	0.98	0.98	0.79	0.77	0.55
	kW*	1.36	1.37	1.37	1.39	1.41	1.39	1.40	1.40	1.42	1.44	1.42	1.42	1.42	1.44	1.46
85	MBh ⁺	22.7	23.3	23.7	25.5	28.0	23.7	23.9	24.3	26.1	28.6	24.7	24.7	24.7	26.6	29.1
	S/T	0.98	0.93	0.74	0.71	0.52	0.98	0.98	0.77	0.75	0.54	0.98	0.98	0.81	0.78	0.56
	kW*	1.52	1.53	1.53	1.55	1.57	1.55	1.55	1.55	1.57	1.59	1.58	1.58	1.58	1.60	1.62
95	MBh ⁺	21.8	22.2	22.5	24.3	26.6	22.8	22.8	23.1	24.8	27.2	23.7	23.7	23.5	25.3	27.6
	S/T	0.98	0.96	0.76	0.73	0.53	0.98	0.98	0.79	0.77	0.55	0.98	0.98	0.83	0.80	0.57
	kW*	1.70	1.70	1.70	1.72	1.74	1.72	1.73	1.73	1.74	1.77	1.75	1.75	1.75	1.77	1.79
105	MBh ⁺	20.8	21.0	21.3	23.0	25.2	21.8	21.8	21.8	23.5	25.7	22.6	22.6	22.2	23.9	26.1
	S/T	0.98	0.98	0.77	0.75	0.54	0.98	0.98	0.81	0.79	0.56	0.98	0.98	0.85	0.83	0.58
	kW*	1.89	1.89	1.89	1.91	1.93	1.92	1.92	1.92	1.93	1.95	1.94	1.94	1.94	1.96	1.98
115	MBh ⁺	19.8	19.9	20.0	21.6	23.7	20.7	20.7	20.5	22.1	24.1	21.4	21.5	20.8	22.4	24.5
	S/T	0.98	0.98	0.79	0.77	0.55	0.98	0.98	0.84	0.81	0.57	0.98	0.98	0.88	0.86	0.60
	kW*	2.10	2.10	2.10	2.12	2.14	2.13	2.13	2.13	2.14	2.16	2.15	2.15	2.15	2.16	2.18
125	MBh ⁺	18.7	18.7	18.6	20.1	22.0	19.5	19.5	19.0	20.5	22.3	20.1	20.2	19.3	20.8	22.6
	S/T	0.98	0.98	0.82	0.80	0.56	0.98	0.98	0.87	0.85	0.59	0.98	0.98	0.92	0.90	0.62
	kW*	2.33	2.33	2.33	2.34	2.36	2.36	2.36	2.35	2.37	2.39	2.38	2.38	2.37	2.39	2.41

PGX324***K**A (Low Capacity)

OD Ambient (°F)	ID Airflow (SCFM)	475					550					625				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	17.3	18.3	18.6	20.3	22.4	18.4	19.0	19.3	21.0	23.2	19.3	19.5	19.8	21.5	23.8
	S/T	0.98	0.88	0.71	0.68	0.50	0.98	0.93	0.74	0.71	0.52	0.98	0.97	0.77	0.74	0.53
	kW*	0.93	0.93	0.92	0.91	0.89	0.93	0.93	0.92	0.91	0.89	0.96	0.96	0.95	0.94	0.92
85	MBh ⁺	16.6	17.3	17.7	19.3	21.3	17.6	18.0	18.3	19.9	22.0	18.5	18.5	18.8	20.4	22.6
	S/T	0.98	0.90	0.72	0.69	0.51	0.98	0.95	0.75	0.72	0.52	0.98	0.98	0.79	0.76	0.54
	kW*	1.10	1.09	1.09	1.08	1.07	1.10	1.10	1.09	1.08	1.06	1.13	1.13	1.13	1.11	1.09
95	MBh ⁺	15.9	16.4	16.8	18.2	20.3	16.8	17.0	17.3	18.8	20.9	17.7	17.7	17.7	19.3	21.3
	S/T	0.98	0.92	0.73	0.70	0.52	0.98	0.98	0.77	0.74	0.53	0.98	0.98	0.81	0.78	0.55
	kW*	1.29	1.28	1.28	1.27	1.26	1.29	1.29	1.28	1.27	1.26	1.32	1.32	1.32	1.31	1.29
105	MBh ⁺	15.2	15.5	15.8	17.2	19.1	16.1	16.1	16.3	17.8	19.7	16.8	16.9	16.7	18.2	20.1
	S/T	0.98	0.95	0.75	0.72	0.52	0.98	0.98	0.79	0.76	0.54	0.98	0.98	0.83	0.80	0.57
	kW*	1.49	1.49	1.49	1.49	1.48	1.50	1.50	1.50	1.49	1.48	1.53	1.53	1.53	1.52	1.51
115	MBh ⁺	14.4	14.6	14.8	16.2	18.0	15.3	15.3	15.3	16.7	18.5	16.0	16.0	15.6	17.0	18.9
	S/T	0.98	0.98	0.77	0.74	0.53	0.98	0.98	0.82	0.79	0.56	0.98	0.98	0.86	0.83	0.58
	kW*	1.73	1.73	1.73	1.73	1.72	1.73	1.73	1.73	1.73	1.72	1.77	1.77	1.77	1.76	1.75
125	MBh ⁺	13.6	13.7	13.8	15.1	16.8	14.4	14.4	14.2	15.5	17.2	15.1	15.1	14.5	15.8	17.5
	S/T	0.98	0.98	0.80	0.77	0.55	0.98	0.98	0.85	0.81	0.57	0.98	0.98	0.89	0.86	0.60
	kW*	1.99	1.99	1.99	1.99	1.99	2.00	2.00	2.00	2.00	1.99	2.03	2.03	2.03	2.03	2.03

Notes: When the required data fall between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.

*Total capacities are net capacities. Blower heat has been subtracted.

** At TVA rating indoor condition (75 F db/ 63 F wb), All other indoor air temperatures are at 80 F db

* System kW is total unit kW

Standard Rating =

S/T are based on 80°F db entering air at the indoor coil. For sensible capacities at other than 80°5 db, deduct 83° Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80°F, or add 835 Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree above 80°F.

EXPANDED PERFORMANCE DATA: COOLING

PGX330***K**A

OD Ambient (°F)	ID Airflow (SCFM)	875					1000					1125				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	28.7	29.7	30.2	32.5	35.5	30.1	30.5	31.0	33.3	36.3	31.2	31.3	31.6	33.9	36.9
	S/T	0.98	0.91	0.73	0.70	0.51	0.98	0.96	0.76	0.73	0.53	0.98	0.98	0.79	0.77	0.55
	kW*	1.78	1.78	1.79	1.81	1.84	1.84	1.84	1.85	1.87	1.90	1.89	1.89	1.89	1.92	1.95
85	MBh ⁺	27.7	28.4	28.9	31.0	33.9	29.0	29.2	29.6	31.8	34.6	30.0	30.1	30.1	32.3	35.2
	S/T	0.98	0.93	0.74	0.71	0.52	0.98	0.98	0.77	0.75	0.54	0.98	0.98	0.81	0.79	0.56
	kW*	1.97	1.98	1.98	2.01	2.04	2.03	2.04	2.04	2.06	2.09	2.08	2.08	2.08	2.11	2.14
95	MBh ⁺	26.6	27.1	27.5	29.5	32.2	27.8	27.8	28.1	30.2	32.9	28.8	28.8	28.6	30.7	33.4
	S/T	0.98	0.95	0.75	0.73	0.53	0.98	0.98	0.79	0.77	0.55	0.98	0.98	0.83	0.81	0.57
	kW*	2.19	2.19	2.19	2.22	2.25	2.25	2.25	2.25	2.27	2.30	2.30	2.30	2.30	2.32	2.35
105	MBh ⁺	25.4	25.6	26.0	27.9	30.4	26.5	26.6	26.5	28.5	31.0	27.4	27.5	27.0	28.9	31.5
	S/T	0.98	0.98	0.77	0.75	0.54	0.98	0.98	0.81	0.79	0.56	0.98	0.98	0.85	0.83	0.58
	kW*	2.42	2.42	2.43	2.45	2.48	2.48	2.48	2.48	2.50	2.53	2.53	2.53	2.53	2.55	2.58
115	MBh ⁺	24.2	24.2	24.4	26.2	28.5	25.1	25.2	24.9	26.7	29.0	26.0	26.0	25.3	27.1	29.4
	S/T	0.98	0.98	0.79	0.77	0.55	0.98	0.98	0.84	0.82	0.57	0.98	0.98	0.88	0.86	0.60
	kW*	2.68	2.68	2.68	2.70	2.73	2.74	2.74	2.73	2.76	2.79	2.79	2.79	2.78	2.80	2.83
125	MBh ⁺	22.7	22.7	22.6	24.2	26.4	23.6	23.6	23.0	24.7	26.8	24.3	24.3	23.4	25.0	27.1
	S/T	0.98	0.98	0.82	0.80	0.56	0.98	0.98	0.87	0.85	0.59	0.98	0.98	0.92	0.90	0.62
	kW*	2.95	2.95	2.95	2.97	3.00	3.01	3.02	3.01	3.03	3.06	3.06	3.06	3.05	3.07	3.10

PGX330***K**A (Low Capacity)

OD Ambient (°F)	ID Airflow (SCFM)	600					700					800				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	21.3	22.3	22.7	24.5	26.9	22.6	23.1	23.5	25.3	27.7	23.6	23.8	24.0	25.9	28.4
	S/T	0.98	0.89	0.71	0.69	0.51	0.98	0.94	0.75	0.72	0.53	0.98	0.99	0.78	0.76	0.54
	kW*	1.16	1.16	1.16	1.17	1.17	1.16	1.16	1.16	1.17	1.17	1.21	1.22	1.22	1.22	1.23
85	MBh ⁺	20.5	21.2	21.6	23.4	25.7	21.7	22.0	22.3	24.1	26.4	22.7	22.7	22.8	24.6	27.0
	S/T	0.98	0.91	0.73	0.70	0.51	0.98	0.97	0.76	0.74	0.53	0.98	0.98	0.80	0.78	0.55
	kW*	1.37	1.37	1.37	1.38	1.38	1.37	1.37	1.37	1.38	1.38	1.42	1.42	1.42	1.43	1.43
95	MBh ⁺	19.6	20.1	20.5	22.1	24.3	20.7	20.8	21.1	22.8	25.0	21.7	21.7	21.6	23.3	25.5
	S/T	0.98	0.94	0.74	0.71	0.52	0.98	0.99	0.78	0.76	0.54	0.98	0.98	0.82	0.80	0.57
	kW*	1.59	1.59	1.60	1.60	1.61	1.60	1.60	1.60	1.60	1.61	1.65	1.65	1.65	1.66	1.66
105	MBh ⁺	18.7	19.0	19.3	20.8	22.9	19.7	19.7	19.8	21.4	23.5	20.6	20.6	20.2	21.8	23.9
	S/T	0.98	0.96	0.76	0.73	0.53	0.98	0.98	0.81	0.78	0.55	0.98	0.98	0.85	0.82	0.58
	kW*	1.84	1.84	1.84	1.85	1.86	1.84	1.84	1.84	1.85	1.86	1.90	1.90	1.90	1.90	1.91
115	MBh ⁺	17.7	17.7	18.0	19.4	21.4	18.6	18.7	18.5	19.9	21.9	19.4	19.4	18.8	20.3	22.2
	S/T	0.98	0.98	0.78	0.76	0.54	0.98	0.98	0.83	0.81	0.57	0.98	0.98	0.88	0.86	0.60
	kW*	2.11	2.11	2.11	2.12	2.13	2.11	2.11	2.11	2.12	2.13	2.17	2.17	2.16	2.17	2.18
125	MBh ⁺	16.6	16.6	16.6	17.9	19.7	17.4	17.4	17.0	18.4	20.1	18.1	18.1	17.3	18.7	20.4
	S/T	0.98	0.98	0.82	0.79	0.56	0.98	0.98	0.87	0.84	0.59	0.98	0.98	0.92	0.90	0.62
	kW*	2.39	2.39	2.39	2.40	2.42	2.40	2.40	2.40	2.41	2.42	2.45	2.45	2.45	2.46	2.47

Notes: When the required data fall between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.

*Total capacities are net capacities. Blower heat has been subtracted.

** At TVA rating indoor condition (75 F db/ 63 F wb), All other indoor air temperatures are at 80 F db

* System kW is total unit kW

Standard Rating =

S/T are based on 80°F db entering air at the indoor coil. For sensible capacities at other than 80°F db, deduct 83° Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80°F, or add 835 Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree above 80°F.

EXPANDED PERFORMANCE DATA: COOLING

PGX336***K**A

OD Ambient (°F)	ID Airflow (SCFM)	1030					1200					1350				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	35.8	37.2	37.9	41.0	45.1	37.6	38.3	38.9	42.0	46.2	39.1	39.3	39.7	42.9	47.1
	S/T	0.98	0.91	0.72	0.69	0.51	0.98	0.95	0.75	0.73	0.52	0.98	0.99	0.79	0.76	0.54
	kW*	2.40	2.41	2.42	2.44	2.47	2.56	2.57	2.58	2.60	2.63	2.73	2.73	2.73	2.76	2.79
85	MBh ⁺	34.4	35.4	36.0	39.0	43.0	36.1	36.5	36.9	39.9	44.0	37.5	37.6	37.7	40.7	44.8
	S/T	0.98	0.93	0.74	0.71	0.51	0.98	0.98	0.77	0.74	0.53	0.98	0.98	0.81	0.78	0.55
	kW*	2.69	2.70	2.70	2.73	2.76	2.85	2.85	2.86	2.89	2.92	3.01	3.01	3.01	3.04	3.08
95	MBh ⁺	33.0	33.6	34.1	36.9	40.7	34.5	34.6	34.9	37.8	41.7	35.9	35.9	35.6	38.5	42.4
	S/T	0.98	0.96	0.75	0.73	0.52	0.98	0.98	0.79	0.76	0.54	0.98	0.98	0.83	0.80	0.56
	kW*	2.99	3.00	3.01	3.04	3.07	3.16	3.16	3.17	3.19	3.23	3.32	3.32	3.32	3.35	3.39
105	MBh ⁺	31.4	31.7	32.1	34.8	38.4	32.9	32.9	32.9	35.6	39.3	34.1	34.2	33.5	36.3	39.9
	S/T	0.98	0.98	0.77	0.74	0.53	0.98	0.98	0.81	0.79	0.55	0.98	0.98	0.85	0.83	0.57
	kW*	3.33	3.33	3.34	3.37	3.41	3.50	3.50	3.50	3.53	3.57	3.66	3.66	3.65	3.68	3.72
115	MBh ⁺	29.8	29.8	30.0	32.6	36.0	31.1	31.2	30.7	33.3	36.8	32.3	32.3	31.2	33.9	37.3
	S/T	0.98	0.98	0.80	0.77	0.54	0.98	0.98	0.84	0.81	0.57	0.98	0.98	0.88	0.86	0.59
	kW*	3.69	3.69	3.70	3.73	3.77	3.86	3.86	3.85	3.89	3.93	4.02	4.02	4.01	4.04	4.08
125	MBh ⁺	28.0	28.1	27.8	30.2	33.5	29.3	29.3	28.4	30.9	34.1	30.3	30.4	28.9	31.4	34.6
	S/T	0.98	0.98	0.83	0.80	0.56	0.98	0.98	0.87	0.85	0.58	0.98	0.98	0.92	0.89	0.61
	kW*	4.08	4.08	4.08	4.11	4.15	4.25	4.25	4.23	4.27	4.31	4.41	4.41	4.39	4.43	4.47

PGX336***K**A (Low Capacity)

OD Ambient (°F)	ID Airflow (SCFM)	750					850					950				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	25.2	26.0	26.5	28.8	31.9	26.4	26.8	27.2	29.5	32.7	27.5	27.6	27.8	30.2	33.3
	S/T	0.98	0.92	0.73	0.71	0.51	0.98	0.97	0.77	0.74	0.53	0.98	0.98	0.80	0.77	0.55
	kW*	1.23	1.19	1.17	1.07	0.94	1.20	1.18	1.17	1.07	0.93	1.18	1.17	1.17	1.06	0.92
85	MBh ⁺	24.1	24.6	25.0	27.2	30.2	25.2	25.3	25.6	27.9	30.9	26.2	26.3	26.2	28.4	31.5
	S/T	0.98	0.95	0.75	0.72	0.52	0.98	0.99	0.79	0.76	0.54	0.98	0.98	0.82	0.79	0.56
	kW*	1.48	1.46	1.44	1.34	1.22	1.45	1.45	1.44	1.34	1.21	1.44	1.43	1.44	1.34	1.21
95	MBh ⁺	22.9	23.1	23.5	25.6	28.4	24.0	24.0	24.1	26.2	29.1	24.9	25.0	24.5	26.7	29.6
	S/T	0.98	0.98	0.77	0.74	0.53	0.98	0.98	0.81	0.78	0.55	0.98	0.98	0.84	0.82	0.57
	kW*	1.75	1.74	1.73	1.64	1.51	1.73	1.73	1.73	1.64	1.51	1.72	1.72	1.73	1.64	1.51
105	MBh ⁺	21.7	21.8	22.0	24.0	26.6	22.7	22.8	22.5	24.5	27.2	23.6	23.6	22.9	24.9	27.7
	S/T	0.98	0.98	0.80	0.77	0.54	0.98	0.98	0.84	0.81	0.56	0.98	0.98	0.87	0.85	0.59
	kW*	2.05	2.05	2.04	1.96	1.84	2.03	2.03	2.05	1.96	1.84	2.02	2.02	2.05	1.96	1.84
115	MBh ⁺	20.5	20.5	20.4	22.3	24.8	21.4	21.4	20.8	22.7	25.3	22.2	22.2	21.2	23.1	25.7
	S/T	0.98	0.98	0.82	0.79	0.56	0.98	0.98	0.87	0.84	0.58	0.98	0.98	0.91	0.88	0.61
	kW*	2.38	2.37	2.38	2.30	2.19	2.36	2.36	2.39	2.30	2.19	2.35	2.35	2.40	2.31	2.19
125	MBh ⁺	19.2	19.2	18.7	20.5	22.8	20.0	20.0	19.1	20.9	23.3	20.7	20.8	19.5	21.3	23.6
	S/T	0.98	0.98	0.86	0.83	0.57	0.98	0.98	0.91	0.88	0.60	0.98	0.98	0.95	0.92	0.63
	kW*	2.73	2.72	2.74	2.67	2.56	2.71	2.71	2.75	2.68	2.57	2.71	2.71	2.76	2.68	2.57

Notes: When the required data fall between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.

*Total capacities are net capacities. Blower heat has been subtracted.

** At TVA rating indoor condition (75 F db/ 63 F wb), All other indoor air temperatures are at 80 F db

* System kW is total unit kW

Standard Rating =

S/T are based on 80°F db entering air at the indoor coil. For sensible capacities at other than 80°5 db, deduct 83° Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80°F, or add 835 Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree above 80°F.

EXPANDED PERFORMANCE DATA: COOLING																
PGX342***K**A																
OD Ambient (°F)	ID Airflow (SCFM)	1225					1400					1575				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	41.3	42.5	43.2	46.5	50.7	43.2	43.7	44.3	47.6	51.8	44.9	44.9	45.2	48.4	52.7
	S/T	0.98	0.92	0.73	0.70	0.51	0.98	0.97	0.76	0.74	0.53	0.98	0.98	0.80	0.78	0.55
	kW*	2.80	2.81	2.82	2.85	2.89	2.92	2.92	2.93	2.96	3.01	2.99	2.99	3.00	3.03	3.08
85	MBh ⁺	39.7	40.6	41.3	44.4	48.4	41.6	41.7	42.2	45.4	49.4	43.1	43.2	43.0	46.1	50.1
	S/T	0.98	0.94	0.74	0.72	0.52	0.98	0.99	0.78	0.76	0.54	0.98	0.98	0.82	0.79	0.56
	kW*	3.08	3.09	3.10	3.13	3.17	3.20	3.20	3.21	3.24	3.29	3.28	3.28	3.27	3.31	3.35
95	MBh ⁺	38.1	38.6	39.2	42.1	45.9	39.8	39.9	40.0	43.0	46.8	41.2	41.3	40.7	43.7	47.4
	S/T	0.98	0.97	0.76	0.73	0.53	0.98	0.98	0.80	0.78	0.55	0.98	0.98	0.84	0.82	0.57
	kW*	3.39	3.40	3.40	3.44	3.48	3.51	3.51	3.51	3.55	3.59	3.58	3.59	3.58	3.61	3.66
105	MBh ⁺	36.4	36.5	37.0	39.7	43.3	37.9	38.0	37.7	40.5	44.0	39.2	39.3	38.4	41.1	44.6
	S/T	0.98	0.99	0.78	0.75	0.54	0.98	0.98	0.82	0.80	0.56	0.98	0.98	0.87	0.84	0.59
	kW*	3.73	3.73	3.74	3.77	3.82	3.85	3.85	3.85	3.88	3.93	3.92	3.93	3.91	3.95	4.00
115	MBh ⁺	34.4	34.5	34.6	37.1	40.4	35.8	35.9	35.3	37.8	41.1	37.0	37.1	35.8	38.4	41.6
	S/T	0.98	0.98	0.80	0.78	0.55	0.98	0.98	0.85	0.83	0.58	0.98	0.98	0.90	0.88	0.61
	kW*	4.10	4.10	4.10	4.14	4.18	4.22	4.22	4.21	4.25	4.29	4.29	4.29	4.28	4.31	4.36
125	MBh ⁺	32.3	32.3	31.9	34.3	37.2	33.5	33.6	32.5	34.9	37.7	34.5	34.6	33.0	35.3	38.2
	S/T	0.98	0.98	0.84	0.81	0.57	0.98	0.98	0.89	0.87	0.60	0.98	0.98	0.94	0.92	0.63
	kW*	4.50	4.50	4.49	4.53	4.57	4.61	4.62	4.60	4.64	4.68	4.69	4.69	4.67	4.70	4.74

PGX342***K**A (Low Capacity)																
OD Ambient (°F)	ID Airflow (SCFM)	800					900					1000				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	30.7	31.4	32.0	34.7	38.4	32.1	32.3	32.8	35.6	39.3	33.3	33.4	33.4	36.3	40.0
	S/T	0.98	0.94	0.75	0.72	0.52	0.98	0.99	0.78	0.75	0.54	0.98	0.98	0.81	0.78	0.55
	kW*	1.35	1.32	1.29	1.16	0.99	1.31	1.30	1.28	1.15	0.97	1.29	1.29	1.28	1.15	0.97
85	MBh ⁺	29.3	29.6	30.2	32.8	36.3	30.6	30.6	30.9	33.5	37.1	31.7	31.8	31.5	34.1	37.7
	S/T	0.98	0.97	0.77	0.74	0.53	0.98	0.98	0.80	0.77	0.55	0.98	0.98	0.83	0.80	0.57
	kW*	1.65	1.64	1.61	1.49	1.33	1.62	1.61	1.60	1.48	1.31	1.60	1.60	1.61	1.49	1.32
95	MBh ⁺	27.8	27.9	28.3	30.8	34.1	29.0	29.1	28.9	31.5	34.8	30.1	30.2	29.5	32.0	35.4
	S/T	0.98	0.98	0.79	0.76	0.54	0.98	0.98	0.82	0.79	0.56	0.98	0.98	0.86	0.83	0.58
	kW*	1.98	1.98	1.96	1.85	1.69	1.95	1.95	1.96	1.84	1.68	1.94	1.93	1.97	1.85	1.69
105	MBh ⁺	26.3	26.4	26.4	28.8	31.9	27.5	27.5	26.9	29.4	32.5	28.5	28.5	27.4	29.9	33.0
	S/T	0.98	0.98	0.81	0.78	0.55	0.98	0.98	0.85	0.82	0.58	0.98	0.98	0.89	0.86	0.60
	kW*	2.34	2.34	2.34	2.23	2.08	2.31	2.31	2.34	2.22	2.07	2.30	2.30	2.35	2.24	2.08
115	MBh ⁺	24.8	24.8	24.4	26.7	29.6	25.8	25.9	24.9	27.2	30.2	26.7	26.8	25.4	27.6	30.6
	S/T	0.98	0.98	0.85	0.81	0.57	0.98	0.98	0.89	0.86	0.59	0.98	0.98	0.93	0.90	0.62
	kW*	2.73	2.72	2.74	2.64	2.50	2.70	2.70	2.75	2.64	2.50	2.70	2.70	2.76	2.66	2.51
125	MBh ⁺	23.1	23.2	22.4	24.5	27.2	24.1	24.1	22.8	24.9	27.7	24.9	24.9	23.2	25.3	28.1
	S/T	0.98	0.98	0.88	0.85	0.59	0.98	0.98	0.93	0.90	0.62	0.98	0.98	0.98	0.95	0.64
	kW*	3.15	3.14	3.18	3.09	2.95	3.13	3.13	3.19	3.09	2.95	3.12	3.12	3.20	3.10	2.97

Notes: When the required data fall between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.

*Total capacities are net capacities. Blower heat has been subtracted.

++ At TVA rating indoor condition (75 F db/ 63 F wb), All other indoor air temperatures are at 80 F db

* System kW is total unit kW

Standard Rating =

S/T are based on 80°F db entering air at the indoor coil. For sensible capacities at other than 80°5 db, deduct 83° Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80°F, or add 835 Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree above 80°F.

EXPANDED PERFORMANCE DATA: COOLING

PGX348***K**A

OD Ambient (°F)	ID Airflow (SCFM)	1400					1600					1800				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	47.6	49.0	49.8	53.7	58.7	49.9	50.4	51.0	54.9	60.0	51.8	51.9	52.0	56.0	61.1
	S/T	0.98	0.93	0.73	0.71	0.51	0.98	0.98	0.77	0.74	0.53	0.98	0.98	0.80	0.78	0.55
	kW*	3.53	3.55	3.56	3.60	3.67	3.68	3.69	3.70	3.75	3.81	3.83	3.83	3.83	3.88	3.94
85	MBh ⁺	45.8	46.8	47.5	51.3	56.1	48.0	48.2	48.7	52.4	57.3	49.8	49.9	49.6	53.4	58.2
	S/T	0.98	0.95	0.75	0.72	0.52	0.98	0.98	0.78	0.76	0.54	0.98	0.98	0.82	0.80	0.56
	kW*	3.86	3.87	3.88	3.93	4.00	4.02	4.02	4.03	4.08	4.14	4.16	4.16	4.16	4.21	4.28
95	MBh ⁺	44.0	44.5	45.2	48.8	53.4	46.0	46.1	46.2	49.8	54.5	47.7	47.8	47.1	50.7	55.3
	S/T	0.98	0.97	0.76	0.74	0.53	0.98	0.98	0.80	0.78	0.55	0.98	0.98	0.84	0.82	0.57
	kW*	4.22	4.23	4.24	4.30	4.36	4.38	4.38	4.39	4.44	4.51	4.53	4.53	4.52	4.57	4.64
105	MBh ⁺	42.1	42.2	42.7	46.2	50.5	44.0	44.0	43.7	47.1	51.5	45.5	45.6	44.5	47.9	52.3
	S/T	0.98	0.98	0.78	0.76	0.54	0.98	0.98	0.83	0.80	0.56	0.98	0.98	0.87	0.84	0.58
	kW*	4.62	4.63	4.64	4.69	4.76	4.78	4.78	4.78	4.84	4.90	4.93	4.93	4.91	4.97	5.03
115	MBh ⁺	40.0	40.1	40.2	43.4	47.5	41.7	41.8	41.0	44.2	48.3	43.2	43.2	41.7	44.9	49.0
	S/T	0.98	0.98	0.81	0.78	0.55	0.98	0.98	0.85	0.83	0.57	0.98	0.98	0.90	0.87	0.60
	kW*	5.06	5.06	5.06	5.12	5.19	5.22	5.22	5.21	5.26	5.33	5.36	5.36	5.34	5.39	5.46
125	MBh ⁺	37.8	37.8	37.4	40.3	44.1	39.3	39.4	38.1	41.0	44.8	40.6	40.6	38.7	41.7	45.3
	S/T	0.98	0.98	0.83	0.81	0.56	0.98	0.98	0.88	0.86	0.59	0.98	0.98	0.93	0.91	0.62
	kW*	5.54	5.54	5.53	5.58	5.65	5.69	5.69	5.67	5.73	5.79	5.83	5.84	5.80	5.86	5.92

PGX348***K**A (Low Capacity)

OD Ambient (°F)	ID Airflow (SCFM)	950					1100					1250				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	33.7	35.0	35.6	38.6	42.6	35.7	36.2	36.7	39.8	43.8	37.3	37.4	37.6	40.7	44.8
	S/T	0.98	0.92	0.73	0.70	0.51	0.98	0.97	0.76	0.73	0.53	0.98	0.98	0.80	0.77	0.55
	kW*	2.03	2.00	1.99	1.92	1.82	2.01	2.00	1.99	1.91	1.81	2.03	2.03	2.03	1.95	1.85
85	MBh ⁺	32.4	33.2	33.9	36.8	40.6	34.2	34.4	34.9	37.8	41.7	35.8	35.8	35.7	38.7	42.6
	S/T	0.98	0.94	0.74	0.71	0.52	0.98	0.99	0.78	0.75	0.54	0.98	0.98	0.82	0.79	0.56
	kW*	2.33	2.31	2.29	2.22	2.13	2.31	2.31	2.29	2.22	2.13	2.33	2.33	2.33	2.26	2.16
95	MBh ⁺	31.0	31.5	32.1	34.8	38.5	32.7	32.8	33.0	35.8	39.6	34.2	34.3	33.7	36.6	40.3
	S/T	0.98	0.97	0.76	0.73	0.53	0.98	0.98	0.80	0.77	0.55	0.98	0.98	0.84	0.81	0.57
	kW*	2.65	2.64	2.63	2.56	2.47	2.64	2.64	2.63	2.57	2.47	2.66	2.66	2.68	2.61	2.51
105	MBh ⁺	29.6	29.7	30.2	32.9	36.4	31.2	31.3	31.1	33.8	37.3	32.6	32.6	31.7	34.5	38.0
	S/T	0.98	0.99	0.78	0.75	0.53	0.98	0.98	0.82	0.80	0.56	0.98	0.98	0.87	0.84	0.58
	kW*	3.01	3.01	3.00	2.94	2.85	3.00	3.00	3.00	2.94	2.85	3.03	3.03	3.05	2.99	2.89
115	MBh ⁺	28.1	28.1	28.3	30.8	34.2	29.6	29.7	29.1	31.6	35.0	30.9	30.9	29.7	32.3	35.6
	S/T	0.98	0.98	0.80	0.77	0.55	0.98	0.98	0.85	0.82	0.57	0.98	0.98	0.90	0.87	0.60
	kW*	3.41	3.41	3.41	3.35	3.27	3.40	3.40	3.42	3.36	3.27	3.43	3.43	3.46	3.40	3.32
125	MBh ⁺	26.5	26.6	26.3	28.7	31.8	27.9	27.9	27.0	29.4	32.5	29.0	29.1	27.5	30.0	33.1
	S/T	0.98	0.98	0.83	0.80	0.56	0.98	0.98	0.89	0.86	0.59	0.98	0.98	0.94	0.91	0.62
	kW*	3.85	3.85	3.86	3.81	3.73	3.85	3.85	3.87	3.82	3.73	3.88	3.88	3.92	3.86	3.78

Notes: When the required data fall between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.

*Total capacities are net capacities. Blower heat has been subtracted.

** At TVA rating indoor condition (75 F db/ 63 F wb), All other indoor air temperatures are at 80 F db

* System kW is total unit kW

Standard Rating =

S/T are based on 80°F db entering air at the indoor coil. For sensible capacities at other than 80°5 db, deduct 83° Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80°F, or add 835 Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree above 80°F.

EXPANDED PERFORMANCE DATA: COOLING

PGX360***K**A

OD Ambient (°F)	ID Airflow (SCFM)	1750					2000					2250				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	60.5	62.0	63.0	67.2	72.8	63.2	63.6	64.4	68.6	74.1	65.4	65.5	65.5	69.7	75.2
	S/T	0.98	0.93	0.73	0.71	0.51	0.98	0.99	0.77	0.75	0.53	0.98	0.98	0.81	0.79	0.56
	kW*	4.77	4.79	4.81	4.89	5.01	5.08	5.08	5.10	5.18	5.30	5.26	5.26	5.26	5.34	5.46
85	MBh ⁺	58.2	59.1	60.0	64.0	69.2	60.6	60.7	61.2	65.3	70.5	62.7	62.8	62.3	66.3	71.4
	S/T	0.98	0.96	0.75	0.73	0.52	0.98	0.98	0.79	0.77	0.54	0.98	0.98	0.83	0.81	0.57
	kW*	5.22	5.23	5.25	5.34	5.45	5.53	5.53	5.54	5.62	5.73	5.71	5.71	5.70	5.78	5.90
95	MBh ⁺	55.6	56.0	56.8	60.6	65.6	57.9	58.0	57.9	61.7	66.6	59.8	59.9	58.8	62.6	67.5
	S/T	0.98	0.98	0.77	0.74	0.53	0.98	0.98	0.81	0.79	0.55	0.98	0.98	0.85	0.83	0.58
	kW*	5.71	5.71	5.73	5.81	5.92	6.01	6.02	6.01	6.10	6.21	6.20	6.20	6.17	6.26	6.37
105	MBh ⁺	52.9	52.9	53.4	57.0	61.6	55.0	55.0	54.4	58.0	62.5	56.7	56.7	55.3	58.8	63.3
	S/T	0.98	0.98	0.79	0.77	0.54	0.98	0.98	0.83	0.81	0.57	0.98	0.98	0.88	0.86	0.60
	kW*	6.23	6.23	6.24	6.33	6.43	6.54	6.54	6.53	6.61	6.72	6.72	6.72	6.69	6.77	6.88
115	MBh ⁺	49.8	49.9	49.7	53.0	57.2	51.7	51.7	50.6	53.9	58.0	53.2	53.3	51.3	54.6	58.6
	S/T	0.98	0.98	0.81	0.79	0.55	0.98	0.98	0.87	0.85	0.59	0.98	0.98	0.92	0.90	0.62
	kW*	6.80	6.79	6.79	6.87	6.97	7.10	7.10	7.07	7.15	7.25	7.28	7.28	7.23	7.31	7.41
125	MBh ⁺	46.3	46.4	45.6	48.5	52.3	47.9	48.0	46.3	49.3	52.9	49.2	49.3	47.0	49.9	53.5
	S/T	0.98	0.98	0.85	0.83	0.57	0.98	0.98	0.91	0.89	0.61	0.98	0.98	0.96	0.95	0.64
	kW*	7.39	7.39	7.37	7.44	7.54	7.69	7.69	7.65	7.72	7.81	7.86	7.86	7.80	7.88	7.97

PGX360***K**A (Low Capacity)

OD Ambient (°F)	ID Airflow (SCFM)	1125					1300					1475				
		Entering Indoor Temperature - Degrees F, Wet Bulb														
		57	62	63++	67	72	57	62	63++	67	72	57	62	63++	67	72
75	MBh ⁺	42.6	44.2	45.0	48.2	52.4	44.8	45.5	46.3	49.5	53.7	46.7	46.8	47.2	50.5	54.6
	S/T	0.98	0.91	0.72	0.70	0.51	0.98	0.96	0.76	0.73	0.53	0.98	0.98	0.79	0.77	0.55
	kW*	2.85	2.83	2.82	2.78	2.74	2.87	2.86	2.86	2.82	2.78	2.90	2.90	2.90	2.86	2.81
85	MBh ⁺	41.0	42.2	43.0	46.0	50.0	43.1	43.4	44.1	47.2	51.1	44.9	44.9	45.0	48.0	52.0
	S/T	0.98	0.93	0.74	0.71	0.52	0.98	0.98	0.77	0.75	0.54	0.98	0.98	0.81	0.79	0.56
	kW*	3.24	3.23	3.22	3.18	3.14	3.26	3.26	3.25	3.22	3.17	3.30	3.30	3.30	3.26	3.21
95	MBh ⁺	39.4	40.1	40.8	43.7	47.4	41.3	41.4	41.8	44.7	48.4	42.9	43.0	42.6	45.5	49.2
	S/T	0.98	0.95	0.75	0.73	0.53	0.98	0.98	0.79	0.77	0.55	0.98	0.98	0.83	0.81	0.57
	kW*	3.67	3.66	3.65	3.62	3.57	3.70	3.70	3.69	3.65	3.61	3.73	3.73	3.73	3.69	3.65
105	MBh ⁺	37.6	37.9	38.5	41.2	44.7	39.3	39.4	39.4	42.1	45.6	40.8	40.9	40.1	42.8	46.3
	S/T	0.98	0.98	0.77	0.75	0.54	0.98	0.98	0.81	0.79	0.56	0.98	0.98	0.86	0.84	0.59
	kW*	4.14	4.14	4.13	4.09	4.04	4.17	4.17	4.17	4.13	4.08	4.20	4.20	4.21	4.17	4.12
115	MBh ⁺	35.6	35.6	36.0	38.5	41.8	37.2	37.2	36.8	39.3	42.6	38.5	38.6	37.4	40.0	43.2
	S/T	0.98	0.98	0.79	0.77	0.55	0.98	0.98	0.84	0.82	0.58	0.98	0.98	0.89	0.87	0.61
	kW*	4.65	4.65	4.64	4.61	4.55	4.68	4.68	4.68	4.64	4.59	4.71	4.71	4.72	4.68	4.63
125	MBh ⁺	33.3	33.4	33.3	35.6	38.6	34.8	34.8	33.9	36.3	39.2	35.9	36.0	34.5	36.8	39.7
	S/T	0.98	0.98	0.82	0.80	0.56	0.98	0.98	0.88	0.86	0.60	0.98	0.98	0.93	0.91	0.63
	kW*	5.20	5.19	5.20	5.16	5.10	5.22	5.22	5.24	5.19	5.13	5.25	5.25	5.28	5.23	5.17

Notes: When the required data fall between the published data, interpolation may be performed. Extrapolation is not an acceptable practice.

*Total capacities are net capacities. Blower heat has been subtracted.

** At TVA rating indoor condition (75 F db/ 63 F wb), All other indoor air temperatures are at 80 F db

* System kW is total unit kW



Standard Rating =

S/T are based on 80°F db entering air at the indoor coil. For sensible capacities at other than 80°5 db, deduct 83° Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree below 80°F, or add 835 Btuh per 1000 cfm of indoor coil air from (MBh x S/T) for each degree above 80°F.

ACCESSORIES

ROOF CURBS

Model Number	Height (K)	Use With Model Size
AXB020CLA	8"	24, 30, 36
AXB020CMA	14"	
AXB020CHA	24"	
AXB030CLA	8"	42, 48, 60
AXB030CMA	14"	
AXB030CHA	24"	

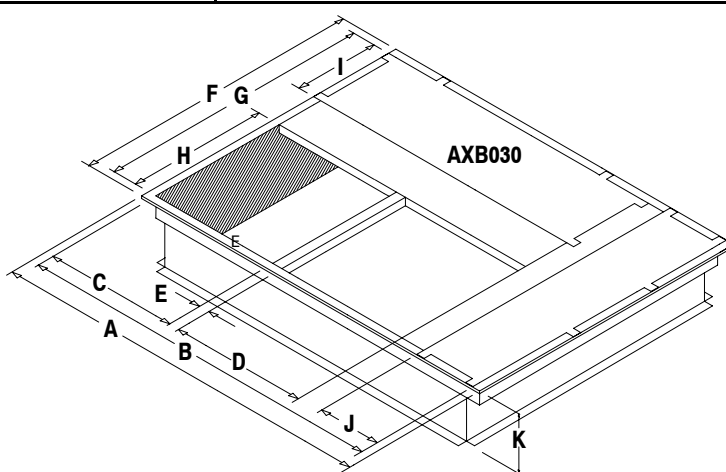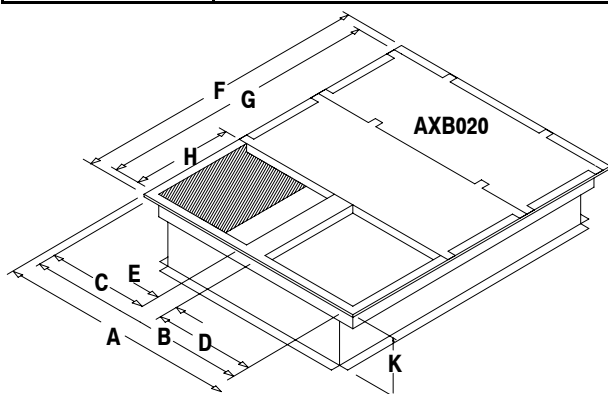

ROOF CURB DIMENSIONS (inches)

Model Number	A	B	C	D	E	F	G	H	I	J	K (LA)	K (MA)	K (HA)
AXB020(L,M,H)A	42-3/4	39-3/4	18	18	3-3/4	42-3/4	39-3/4	18	-	-	8	14	24
AXB030(L,M,H)A	67-3/4	64-3/4	23	23	2-1/2	42-3/4	39-3/4	23	12	12	8	14	24

SQUARE to ROUND TRANSITION

Model Number	Round Size	Use With Roof Curb	Use With Model Size
AXB020CTA	16"	AXB020CLA, AXB020CMA, AXB020CHA	24, 30, 36
AXB030CTA	18"	AXB030CLA, AXB030CMA, AXB030CHA	42, 48, 60

CONCENTRIC GRILLE - FLUSH MOUNT

Model Number	Use With Roof Curb	Use With Model Size
AXB020CFA	AXB020CLA, AXB020CMA, AXB020CHA	24, 30, 36
AXB030CFA	AXB030CLA, AXB030CMA, AXB030CHA	42, 48, 60

CONCENTRIC GRILLE - STEP DOWN

Model Number	Use With Roof Curb	Use With Model Size
AXB020CSA	AXB020CLA, AXB020CMA, AXB020CHA	24, 30, 36
AXB030CSA	AXB030CLA, AXB030CMA, AXB030CHA	42, 48, 60

ACCESSORIES

ECONOMIZERS (ALL FULLY MODULATING)*

Part Number	Application	Motion	Control	Use With Model Size
AXB020HED	Horizontal	Fully Modulating w/ Return Air Damper w/ Relief Damper	Enthalpy	24, 30, 36
AXB030HED				42, 48, 60
AXB020EMD	Downflow			24, 30, 36
AXB030EME				42, 48, 60
AXB020HPE	Horizontal	Fully Modulating w/ Return Air Damper w/ Relief Damper	Dry Bulb Only	24, 30, 36
AXB030HPE				42, 48, 60
AXB020EPE	Downflow			24, 30, 36
AXB030EPF				42, 48, 60

- * Three position economizers no longer available.
 Economizers for model sizes 24, 30, and 36 include Filters and Filter Racks.
 Economizers for model sizes 42, 48, and 60 do NOT include Filters (Filter Racks shipped with unit).

0% - 25% FRESH AIR DAMPERS (use in DOWNFLOW application only) *

Model Number	Control	Use With Model Size
AXB020FAC	Manual	24, 30, 36
AXB030FAC		42, 48, 60
AXB020FMC	Motorized	24, 30, 36
AXB030FMC		42, 48, 60

- * Unit must have internal filters to protect evaporator coil when Fresh Air Damper is installed.
 Model sizes 24, 30, and 36 shipped WITHOUT Filter Racks or Filters.
 Model sizes 42, 48, and 60 shipped WITH Internal Filter Racks, but WITHOUT Filters.

FILTER RACK and FILTER *

Model Number	Application	Filter Location	Filter Size	Use With Model Size
AXB020FKA	Downflow	Internal	18 x 25 x 1	24, 30, 36
AXB020FHC	Horizontal	External	20 x 25 x 1	

- * Model sizes 24, 30, and 36 shipped WITHOUT Filter Racks or Filters.
 Model sizes 42, 48, and 60 shipped WITH Internal Filter Racks, but WITHOUT Filters.

LOW AMBIENT CONTROL

FAST Part Number	Description	Use With Model Size
1148232	Freeze 'stat, opens 30° F, closes 50° F	ALL
ALA14CU0A	R-410A Low Ambient Control	ALL

COIL PROTECTION

FAST Part Number	Description	Use With Model Size
1149485	Coil Guard, black, two-piece	24, 30, 36
1068133	Hail Guard, black, two-piece	24, 30, 36
1149486	Coil Guard, black, three-piece	42, 48, 60
1068134	Hail Guard, black, three-piece	42, 48, 60


INDOOR THERMOSTAT

FAST Part Number	Description	Use With Model Size
TSTAT0404	Two-stage heat, Two-stage cool - without humidification control	ALL
TSTAT0405	Two-stage heat, Two-stage cool - with humidification control	ALL

GAS CONVERSION KITS

FAST Part Number	Description	Heat Input (BTUH)	Elevation above Sea Level
1173857	Natural Gas to LP Gas	40,000 - 140,000	0' - 4,000'
1173859			4,001' - 9,000'
1173861			9,001' - 10,000'
1173863	LP Gas to Natural Gas		0' - 10,000'

UNIT DIMENSIONS

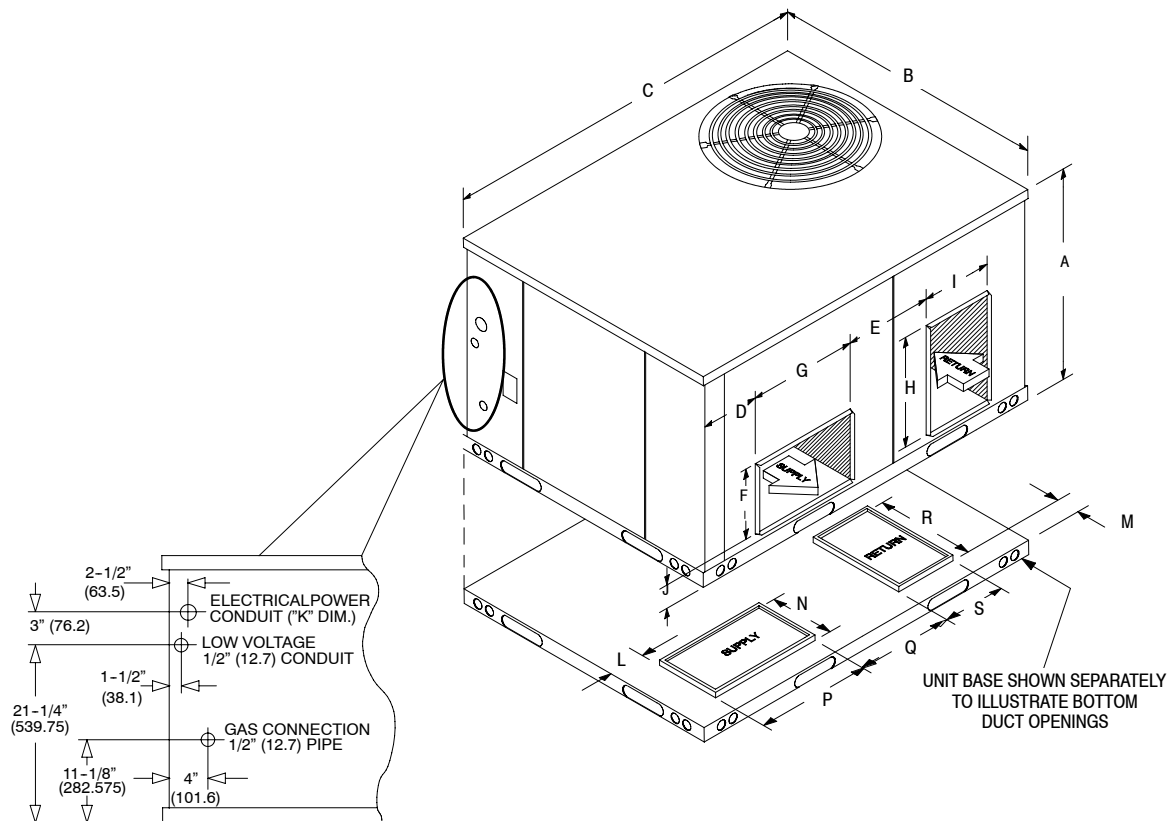

ALL DIMENSIONS IN INCHES

Model Size	A	B	C	D	E	F	G	H	I	J	K	L	M	N**	P**	Q	R	S	Bottom L x W * Inside Base Rail
2, 2 1/2, 3 Ton	32-1/2	47-3/8	47-3/8	3-1/8	11-1/8	12	14-1/4	14-1/4	12	4	*	4-1/4	4-3/8	14-1/2	12-1/4	12-1/8	14-1/4	12-1/4	43-1/8 x 43-1/8
3 1/2, 4, 5 Ton	36	47-3/8	73	4-5/8	15	12	18-3/4	18-3/4	12	4	*	4-1/4	5-1/4	12-1/4	19	15	19	12-1/4	68-3/4 x 43-1/8

** The supply opening in the drawing is shown for the orientation in the 3-1/2 to 5 Ton units. The opening for the 2 to 3 Ton units is rotated 90°, so the N and P dimensions are correct.

MODEL NUMBER IDENTIFICATION GUIDE

Product Family	SEER	Nominal Cooling Capacity Btuh	Heating Input Btuh	Voltage	Option Code	Design Code	Eng. Rev. Code
PGX - Package Gas/Electric R-410A	3 = 13	24 = 24,000	000 = N/A	K = 208/230-1-60	00 = Nat 01 = Lo Nox	A	1
		30 = 30,000	040 = 40,000				
		36 = 36,000	060 = 60,000				
		42 = 42,000	080 = 80,000				
		48 = 48,000	100 = 100,000				
		60 = 60,000	120 = 120,000				
Example: PGX	3	24	060	K	00	A	1

GUIDE SPECIFICATIONS

CABINET

The cabinet is made of G-90 galvanized steel, phosphate coated with a tough acrylic finish coat for long lasting weatherproof construction. The base rails are 18 gauge steel with fork lift slots and holes provided for lifting shackles. The unit is designed with convertible airflow for either horizontal or downflow applications with conversion accomplished by re-locating two panels. Indoor blower compartment interior cabinet surfaces are insulated with a minimum 3/4" thick, flexible glass insulation, coated on the air side. Aluminum foil faced glass fiber insulation is used in the furnace compartment.

COOLING SECTION

The unit is factory charged and operationally ready upon delivery. The unit refrigerant circuit has a high efficiency scroll compressor with internal overload protection, and copper tube / aluminum fin evaporator and condenser coils. The unit is designed for cooling operation to 40° F and will be capable of being wired for field installed economizer type accessories.

COILS

The evaporator and condenser coils are fabricated with aluminum fins mechanically bonded to copper tubing. Both coils are pressure tested prior to assembly into the unit and electronically leak tested after assembly into the unit.

CONDENSER FAN

The unit has a single direct-drive propeller-fan / motor assembly. The assembly is mounted directly to a vertical-discharge grille that is easily removed for service. Motors are 1100 RPM with sleeve or ball bearings and internal overload protection.


EVAPORATOR BLOWER

All units have a direct-drive high efficiency brushless DC evaporator blower motor as a standard. The direct-drive evaporator blower motor has sleeve bearings and internal overload protection.


HEATING SECTION

The gas-fired heating section features an induced draft blower for combustion air. The unit has a tubular stainless steel heat exchanger located on the discharge air side of the blower. The system uses in-shot burners ignited by a direct spark ignition system, protected by both a high heat limit switch and flame roll-out switch. The induced draft blower motor is interlocked with a proven air pressure safety device.

RIGGING DETAILS

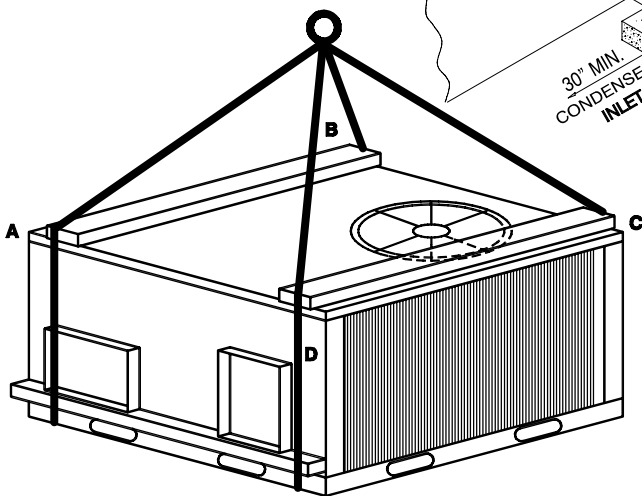

INSTALLATION CLEARANCES

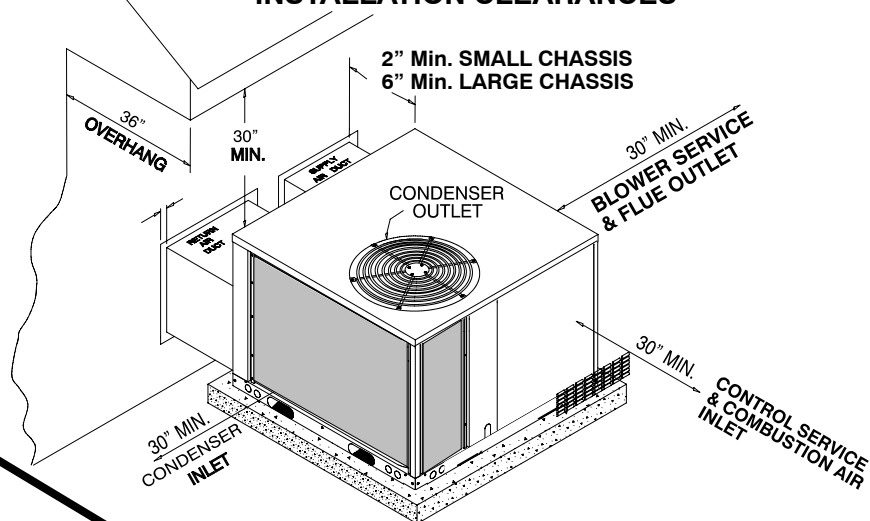

OPERATING WEIGHTS (LBS)

Model	OPERATING WEIGHT TOTAL
PGX324040K0*A	425
PGX324060K0*A	429
PGX324080K0*A	434
PGX330040K0*A	429
PGX330060K0*A	432
PGX330080K0*A	432
PGX336060K0*A	434
PGX336080K0*A	446
PGX336100K0*A	438
PGX342080K0*A	606
PGX342100K0*A	608
PGX348080K0*A	610
PGX348120K0*A	612
PGX348140K0*A	613
PGX360080K0*A	622
PGX360120K0*A	624
PGX360140K0*A	625